



BJ 06 - BJ 26 - BJ 46 Ancora a scatto, in acciaio zincato, con occhio aperto, dado e rondella



SCHEDA TECNICA

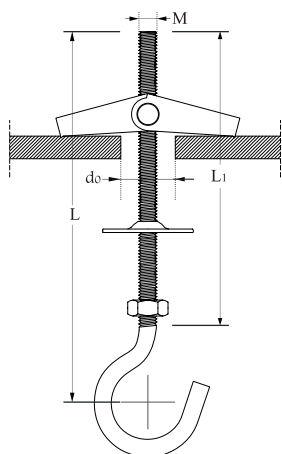

BJ 06 - BJ 26

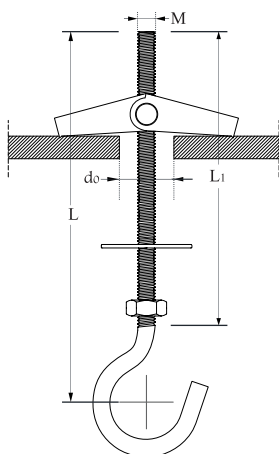

BJ 46

d_0	diametro foro
L	lunghezza vite
M	diametro vite
L_1	lunghezza filettatura vite
N_k	Carico caratteristico a estrazione

DATI TECNICI PER APPLICAZIONI SU LATERIZIO


Codice Articolo	Misura Vite $M \times L$ (mm)	d_0 (mm)
con occhio aperto, dado e rondella		
BJ 26 04 070	M4 x 70	12
BJ 06 04 070	M4 x 70	14
BJ 06 05 070	M5 x 70	14
BJ 46 06 075	M6 x 75	18

LATERIZIO	M (mm)	L (mm)	d_0 (mm)	N_k (kN)
	4	70	12	0,60
	4	70	14	0,60
	5	70	14	0,76
	6	75	18	1,23


BJ 05 - BJ 25 - BJ 45 Steel toggle anchor with spring, nut and washer, zinc plated, with hook screw



TECHNICAL DATA SHEET

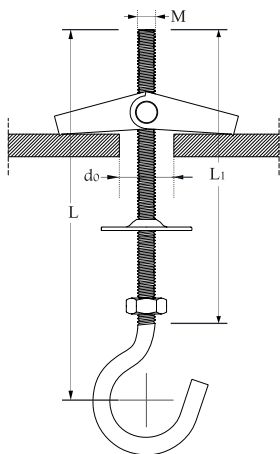

BJ 06 - BJ 26

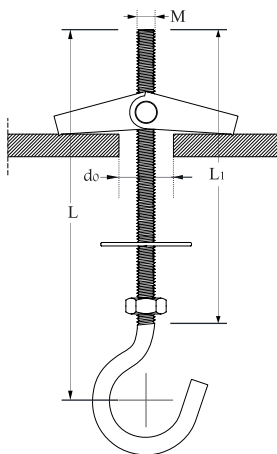

BJ 46

d_0	drill hole diameter
L	screw length
M	screw diameter
L_1	Thread length
N_k	Characteristic resistance to tension load

TECHNICAL DATA FOR USE ON BRICK

Item Code	Screw size <i>M x L (mm)</i>	d ₀ <i>(mm)</i>
with hook screw, nut and washer		
BJ 26 04 070	M4 x 70	12
BJ 06 04 070	M4 x 70	14
BJ 06 05 070	M5 x 70	14
BJ 46 06 075	M6 x 75	18

BRICK	M (mm)	L (mm)	d ₀ (mm)	N _k (kN)
	4	70	12	0,60
	4	70	14	0,60
	5	70	14	0,76
	6	75	18	1,23